

55" Singleside / Doubleside IP65 Outdoor EV Charger

PRICE
4990€

AVAILABLE
NOW



CITYLIGHT EV CHARGER

Ideal for restaurants, parking garages, shopping centers


Available now! Branding to the client's wishes!





4.3 inch LCD Screen Displays Charging Status

Support RFID card, APP payment, QR code payment, charging card and credit card payment;
Support emergency braking;

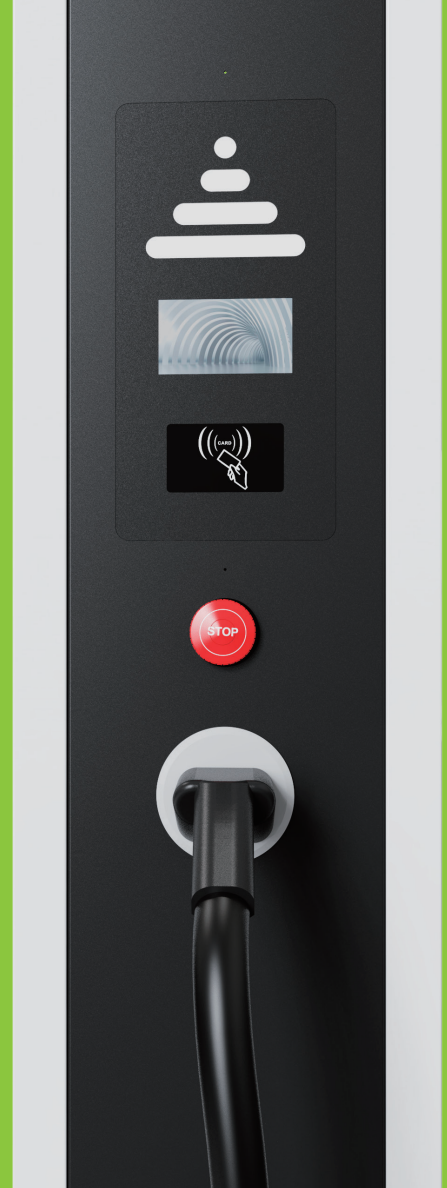

Single gun (7kW) Double gun (21kW)

Universal Charging Head, Plug And Charge.



System



Brightness
3700cd/m²



Audio System



Temperature
Operation-20 - 50°C



Wi-Fi



EETI PCAP
Touch



Short Circuit Protection



Voltage Protection



Charging Protection



IP65

Add-ons



Camera



Bluetooth



4G



High Brightness
2000-3500nits Optional



Media Players
Android /Windows /
Plug&play System/Monitor

Dimension



Payment system



Credit/Debit Card



NFC

Key Features

| | |
|-------------------------|--|
| Number of charging guns | Double |
| Man machine interface | 55 inch+4.3 inch LED |
| Networking Mode | Ethernet, WIFI (Bluetooth, 4G optional) |
| Support protocol | Support OCPP charging protocol |
| Charging start mode | NFC(QR code optional); Network scan code plug and charge |
| Protection Function | Short circuit protection, over current protection, over temperature protection, leakage protection, over/under voltage protection. |
| Charging mode | Automatic charging, full self-stop. |
| Length of gun line | 5M |
| Usage Environment | Outdoor |
| Operating temperature | -20 - 50°C |
| Touch | Responsive 10-Points PCAP touch Optional |
| Color | Black/white Optional |
| Glass | Black |
| Optional | Colour customization in any RAL reference Further configuration options upon request |

Panel

| | |
|-------------------|-----------------------|
| Panel Model | 55inch TFT LED |
| Max Resolution | 1920x1080 |
| Aspect Ratio | 16:9 |
| Pixel Pitch | 0.63x0.63 |
| Viewing Angle | 89/89/89/89 |
| Contrast Ratio | 1400:1 |
| Brightness | 3500cd/m ² |
| Response Time | 6ms |
| Display Area (mm) | 1209.6x680.4mm |
| Panel Size(mm) | 1225.2x696.7x1.4 |
| Screen Weight | 180g |

Packaging

| | |
|--------------------|-----------------|
| Net weight | 443kg |
| Gross weight | 560kg |
| Unit dimensions | 2620x314x1190mm |
| Package dimensions | 2800x710x1460mm |

Optional

Colour customization in any ral reference
Flight case for transport/ wooden box
Further configuration options upon request
Addition illuminated or non-illuminated logo


Power Supply

| | |
|-------------------|-------------|
| Voltage | AC 100-240V |
| Power Consumption | 500W |

System

| | |
|------------|--------------------|
| Processor | Rk3288 |
| Ram | 2G/4G DDR4 |
| Hard drive | 8G/32G/64G |
| OS | Android 7.1/9.0/11 |

Interface

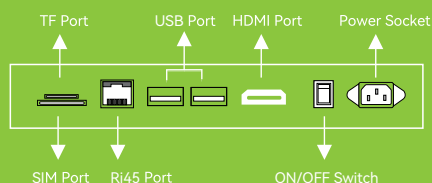

Compatible With Android, Windows
(Customized Unit Option)

Rineo Digital / RINEO SIGN FACTORY

Velika cesta 16, 10020 Novi Zagreb, CROATIA
www.rineo-digital.com / www.rineo.hr
+385 1 7890-474 / info@rineo.hr

